

- MI-SAIL-AR lighting fixture, built in the MIFOR-70 system
- Includes a light source and a wire suspension system
- Easy assembly
- Easy suspension height adjustment


#### APPLICATION

- main and decorative lighting
- construction of lighting installations with flowing shapes

#### MOUNTING

- suspended, using dedicated accessories

#### TECHNICAL DRAWING

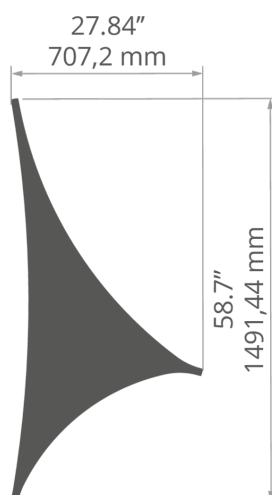

#### TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver anodized
Diffuser material	PC
Control type	wired on / off
Mounting type	Suspended
Length	1491.44 mm
IP protection rating	20
Luminous flux of the fixture	5293 lm
Maximum luminous efficacy	82 lm/W
Closest color temperature	4000 K
Color rendering index	90 CRI

MacAdam's ellipse	3 SDCM
Input voltage	24 V
Power consumption	65 W
Protection class	III
Working temperature	10°C - 30°C
Weight	3.86 kg
Height	70 mm
Width	707.2 mm
Main lighting	yes
Decorative lighting	yes

SAMPLE PROJECTS



RELATED SYSTEMS > MIFOR-70 CUSTOM



MIFOR-70