

24 V



IP20

- Module for building shapes MI-WAVE in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment


#### APPLICATION

- main and decorative lighting
- construction of lighting installations with flowing shapes

#### MOUNTING

- suspended, using dedicated accessories

#### TECHNICAL DRAWING

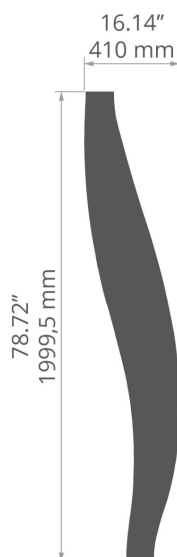


#### TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver anodized
Diffuser material	PC
Control type	wired on / off
Mounting type	Suspended
Length	1999.5 mm
IP protection rating	20
Luminous flux of the fixture	6419 lm
Maximum luminous efficacy	69 lm/W
Closest color temperature	4000 K

Color rendering index	90 CRI
MacAdam's ellipse	3 SDCM
Input voltage	24 V
Power consumption	93 W
Protection class	III
Working temperature	10°C - 30°C
Weight	5.1 kg
Width	410 mm
Main lighting	yes
Decorative lighting	yes

SAMPLE PROJECTS

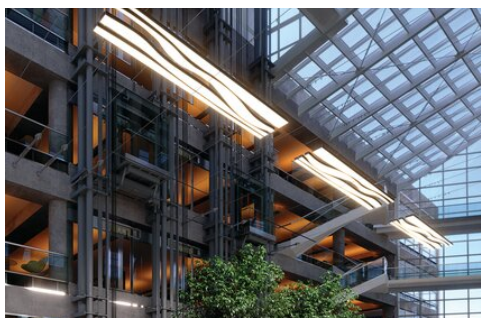

---

RELATED SYSTEMS > MIFOR-70 CUSTOM



MIFOR-70