

- Module for building shapes MI-WAVE in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment


#### APPLICATION

- main and decorative lighting
- construction of lighting installations with flowing shapes

#### MOUNTING

- suspended, using dedicated accessories


#### TECHNICAL DRAWING

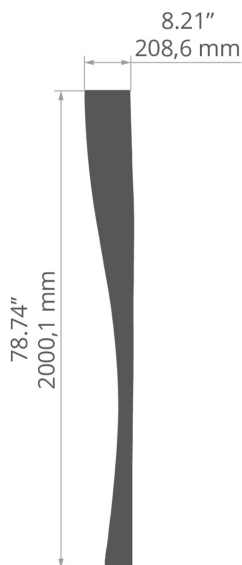

#### TECHNICAL SPECIFICATIONS

Material	aluminum	Color rendering index	90 CRI
Color	■ silver anodized	MacAdam's ellipse	3 SDCM
Diffuser material	PC	Input voltage	24 V
Control type	wired on / off	Power consumption	51 W
Mounting type	Suspended	Protection class	III
Length	2000.1 mm	Working temperature	10°C - 30°C
IP protection rating	20	Weight	3.84 kg
Luminous flux of the fixture	3546 lm	Width	208.6 mm
Maximum luminous efficacy	69 lm/W	Main lighting	yes
Closest color temperature	4000 K	Decorative lighting	yes

SAMPLE PROJECTS

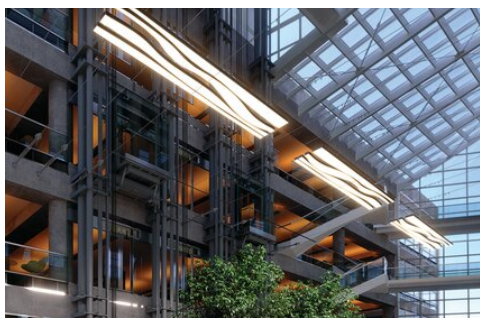

---

RELATED SYSTEMS > MIFOR-70 CUSTOM



MIFOR-70